



Submittal Data: **Wall Mounted Split-System**  
 Model: **ACE12HP110/ACC12HP110**  
 Style: **Cool with Heat Pump**

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

**Capacities:**

Cooling	Btu/Hr	12,000
Heating	Btu/Hr	12,000
Cooling/Heating Current	Amps	9.6/9.6
SEER		13.0
Average Cooling Capacity (Ft)		600

**Indoor Unit**

Rated Voltage	Volts	110
Rated Frequency	Hertz	60
Noise Level	dB(a)	32
Weight	Lbs	22
Air Flow Rate	CFM	400

**Outdoor Unit:**

Power Supply	Volts	110
Breaker Size	Amps	20
Cooling/Heating Power	Watts	1,010
Weight	Lbs	86
Refrigerant	Type	R410A

**Refrigerant Piping:**

Max Height Difference	Feet	16.5
Max Total Length	Feet	33
Discharge Liquid Line	Inch	1/4"
Suction Line	Inch	1/2"
Drain Line	Inch	1/2"

**Outline and Dimensions**

**Indoor Evaporator**


Depth: 7.1 in. Width: 31.1 in. Height: 10.6 in.

**Outdoor Condenser**

Depth: 11.6 in. Width: 33.5 in. Height: 23.8 in.



**Power Connection Wiring Diagram**

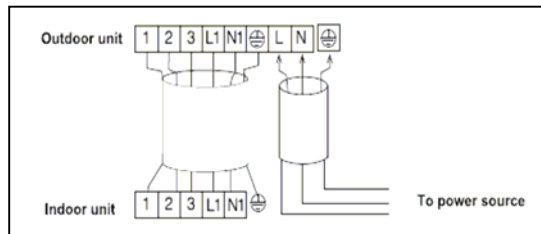

**Standard Features:**

- Five Year Compressor Warranty
- Three Year PC Board Warranty
- One Year Parts Warranty
- (Opt) Low Ambient Control Kit
- LCD Wireless Remote
- Outdoor Golden Fin Treatment
- "Dry" Mode Dehumidification
- Energy Saving "Sleep" Mode
- Indoor Hydrophilic Coated Fins
- 24-Hour Programmable Timer
- 3 Stage Indoor Fan Speed
- Heavy-Gauge Galvanized Steel
- Cold Catalyst Sterilization Filter
- Self-Diagnosis Operation
- Outlet Air Directional Control

**Notes:**

---



---



---