



Submittal Data: **Wall Mounted Split-System**  
 Model: **ACE18CO220/ACC18CO220**  
 Style: **Cool Only**

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_


Capacities:		
Cooling	Btu/Hr	18,000
Heating	Btu/Hr	N/A
Cooling Current	Amps	6.5
SEER		13.0
Average Cooling Capacity (Ft)		900
Indoor Unit		
Rated Voltage	Volts	220
Rated Frequency	Hertz	60
Noise Level	dB(a)	45
Weight	Lbs	40
Air Flow Rate	CFM	625
Outdoor Unit:		
Power Supply	Volts	220
Breaker Size	Amps	15
Cooling Power	Watts	1,480
Weight	Lbs	143
Refrigerant	Type	R410A
Refrigerant Piping:		
Max Height Difference	Feet	16.5
Max Total Length	Feet	50
Discharge Liquid Line	Inch	3/8"
Suction Line	Inch	5/8"
Drain Line	Inch	1/2"

**Outline and Dimensions**

**Indoor Evaporator**  
 Depth: 8.9 in. Width: 45.5 in. Height: 12.8 in.  
**Outdoor Condenser**  
 Depth: 13.0 in. Width: 35.4 in. Height: 33.0 in.



**Power Connection Wiring Diagram**

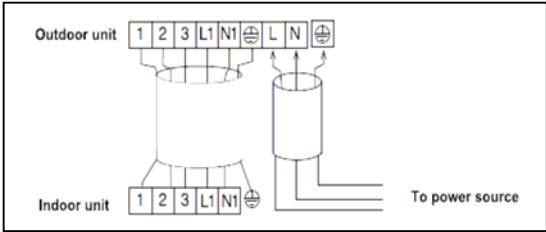

**Standard Features:**

- Five Year Compressor Warranty
- (Opt) Low Ambient Control Kit
- "Dry" Mode Dehumidification
- 24-Hour Programmable Timer
- Cold Catalyst Sterilization Filter
- Three Year PC Board Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- Self-Diagnosis Operation
- One Year Parts Warranty
- Outdoor Golden Fin Treatment
- Indoor Hydrophilic Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

**Notes:**

---



---



---