



Submittal Data: **Wall Mounted Split-System**  
 Model: **ACE18HP220/ACC18HP220**  
 Style: **Cool with Heat Pump**

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

**Capacities:**

Cooling	Btu/Hr	18,000
Heating	Btu/Hr	18,000
Cooling/Heating Current	Amps	6.5/6.4
SEER		13.0
Average Cooling Capacity (Ft)		900

**Indoor Unit**

Rated Voltage	Volts	220
Rated Frequency	Hertz	60
Noise Level	dB(a)	45
Weight	Lbs	40
Air Flow Rate	CFM	625

**Outdoor Unit:**

Power Supply	Volts	220
Breaker Size	Amps	15
Cooling/Heating Power	Watts	1,480
Weight	Lbs	143
Refrigerant	Type	R410A

**Refrigerant Piping:**

Max Height Difference	Feet	16.5
Max Total Length	Feet	50
Discharge Liquid Line	Inch	3/8"
Suction Line	Inch	5/8"
Drain Line	Inch	1/2"

**Outline and Dimensions**

**Indoor Evaporator**


Depth: 8.9 in. Width: 45.5 in. Height: 12.8 in.

**Outdoor Condenser**

Depth: 13.0 in. Width: 35.4 in. Height: 33.0 in.



**Power Connection Wiring Diagram**

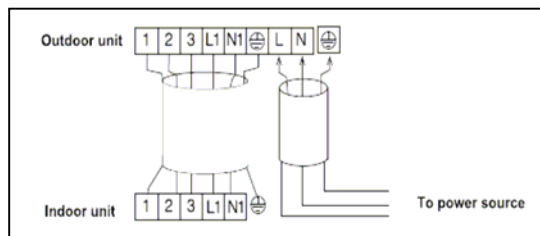

**Standard Features:**

- Five Year Compressor Warranty
- (Opt) Low Ambient Control Kit
- "Dry" Mode Dehumidification
- 24-Hour Programmable Timer
- Cold Catalyst Sterilization Filter
- Three Year PC Board Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- Self-Diagnosis Operation
- One Year Parts Warranty
- Outdoor Golden Fin Treatment
- Indoor Hydrophilic Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

**Notes:**

---



---



---