



Submittal Data: **Wall Mounted Split-System**  
 Model: **ACE09HP110I/ACC09HP110I**  
 Style: **Cool with Heat Pump Inverter**

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

Capacities:		
Cooling	Btu/Hr	9,000
Heating	Btu/Hr	9,000
Maximum Current	Amps	10.6
SEER		18.0
Average Cooling Capacity (Ft)		450
Indoor Unit		
Rated Voltage	Volts	110
Rated Frequency	Hertz	60
Noise Level	dB(a)	44
Weight	Lbs	22
Air Flow Rate	CFM	350
Outdoor Unit:		
Power Supply	Volts	110
Breaker Size	Amps	15
Cooling/Heating Power	Watts	771
Weight	Lbs	79
Refrigerant	Type	R410A
Refrigerant Piping:		
Max Height Difference	Feet	16.5
Max Total Length	Feet	33
Discharge Liquid Line	Inch	1/4"
Suction Line	Inch	1/2"
Drain Line	Inch	1/2"

### Outline and Dimensions

#### Indoor Evaporator


Depth: 9.8 in. Width: 33.4 in. Height: 13.4 in.

#### Outdoor Condenser

Depth: 12.7 in. Width: 35.6 in. Height: 22.6 in.



### Power Connection Wiring Diagram

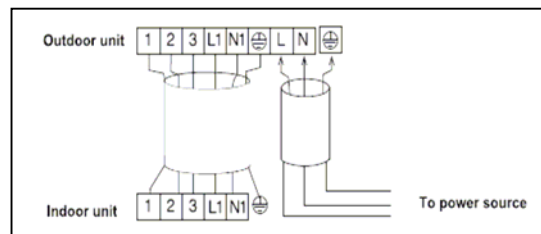

### Standard Features:

- Five Year Compressor Warranty
- (Opt) Low Ambient Control Kit
- "Dry" Mode Dehumidification
- 24-Hour Programmable Timer
- Cold Catalyst Sterilization Filter
- Three Year PC Board Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- Self-Diagnosis Operation
- One Year Parts Warranty
- Outdoor Golden Fin Treatment
- Indoor Hydrophilic Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

### Notes:

---



---



---